


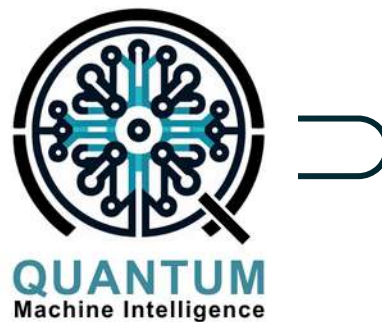

crosscontrol
making machines smarter, safer and more productive

CCpilot V710

NEXT GENERATION IMX8X BASED DISPLAY

About CCpilot V710

The **CCpilot V710** is a 7" display computer based on an i.MX 8DualXPlus application processor with a powerful integrated GPU to support premium HMI applications for instrumentation, video, control, automation, infotainment, and telematics. The 7" high brightness, IPS-type screen, with optically bonded tempered glass, offers best-in-class contrast and viewing angles for superb visibility, and high scratch resistance without fogging. For intuitive tactile interaction in difficult conditions without compromising screen space the **CCpilot V710** features 10 softkeys and an optional multi-touch PCAP touch screen. Interfaces include Ethernet, CAN, high-speed USB, and optional Bluetooth and Wi-Fi for wireless connectivity.

The **CCpilot V710** is available with LinX, our open and modular software platform. It includes firmware and OS support, prepackaged application toolchains for Qt and CODESYS, and application modules for commonly required functionality; including fast boot, vision systems and connectivity. System designers can choose the level, configuration, and development tools that fit their needs and can therefore work with, not against, the expertise and resources they already have. With the open platform approach, customers can base their solution on a robust and secure base while keeping the flexibility to use in-house or 3rd party development resources. With its vast software capabilities and state-of-the-art hardware, the **CCpilot V710** is a future-ready platform for machine intelligence.



crosscontrol - CCpilot V710 Product Specifications

COMPUTING CORE

OVERVIEW	ARM dual core CPU with integrated GPU & Co-processor designed to meet automotive requirements and reliability.
CPU	i.MX 8DualXPlus, (2 x Cortex A35 @ 1.2 GHz)
GPU	Vivante GC7000lite for hardware acceleration of 2D, 3D & vector graphics, 1600 Mpixels/s and 52 GFLOP.
STORAGE	4 GB eMMC in robust pseudoSLC mode
RAM	1 GB 32 bit LPDDR4 @ 1200MHz

OPERATING SYSTEM

SYSTEM	CCLinux, custom Yocto based Linux system
KERNEL	5.15 (Long Term Support) or newer
BSP	Yocto 4.0 (Kirkstone) or newer
COMPUTING & GRAPHICS APIS	Support for advanced UX and computing tasks: OpenGL ES 3.1, Vulkan, OpenCL 1.2, OpenVG 1.1
BOOTUP TIME	Optimizable, with cold boot down to ~3sec

DISPLAY

TYPE	IPS Type with >88 degree viewing angles
COVER LENS	Tempered glass with AG coating
OPTICAL BONDING	Yes. IPS screen and cover lens optically bonded to achieve sunlight readability.
SIZE & RESOLUTION	7" WVGA, 800x480 pixels
COLOUR DEPTH	24 bit
CONTRAST RATIO*	1000:1
BRIGHTNESS*	800 cd/m ²
DIMMING	Yes, in steps, 1-100%

HMI

TOUCH SCREEN	Option for PCAP with up to 10-point multitouch. Calibrated to support interaction with gloves and is insensitive to water drops from rain etc. Sensitivity is also adjustable based on operating conditions and application.
SOFT KEYS	10 freely configurable buttons with dimmable and individual On/Off controlled LED:s
STATUS LED	Dimmable RGB LED
BUZZER	Yes, configurable frequency and volume.
AMBIENT LIGHT SENSOR	Yes, enabling automatic dimming

SOFTWARE FRAMEWORKS & TOOLS

DEVELOPMENT ENVIRONMENT

Virtual machine or Native Linux.

PROGRAMMING

Supported languages include C++, C, QML, JavaScript, Python, HTML5, IEC61131-3.

GCC COMPILER

aarch64-poky-linux-GCC 8.3.0 C++17 or newer

UI FRAMEWORKS

Qt Open Source and optional Qt Commercial. Support for Web frameworks.

WINDOWING

Weston, Qt Wayland and direct EGLFS

APPLICATION PLATFORM

LinX Software Suite, open and modular platform based on Qt, common for all CCpilot products. Examples of modules and components listed below.

GUI DESIGN

UX Designer, a pre-built virtual machine with Qt Creator, compilers, libraries, graphical components and templates.

CAN NETWORKING

Fieldbus Access, easy configuration of J1939 and CANopen networks.

REMOTE APPLICATION ACCESS

VNC server and client, web browser and server.

SOFT PLC

CODESYS 3.5

DIGITAL VIDEO

Ready-made solution for displaying digital camera streams over Ethernet. RTP, MPEG4, MJPEG, H.264 (4Kp30) and H.265.

INTERFACES

CAN

2 x CAN ports, physical layer ISO 11898 2.0B. Configurable bit rate. CAN/FD support

USB

1 x USB 2.0 high speed

ETHERNET

1 x 10/100Base-T

WIRELESS

Option to add Wi-Fi and Bluetooth® (version 5).

I/O

2 configurable inputs, 2 configurable high side outputs

POWER SUPPLY

9-36 VDC. CPU and communication operational down to 6 VDC

KEY SWITCH

1 Key switch input, for start-up/suspend/resume/ shutdown

ENVIRONMENTAL SPECIFICATIONS

IP CLASS

IP65, IP66, and IP67

EMC CONFORMITY

2014/30/EU, ISO 14982:2009, ISO 13766-1:2018, ISO13766-2:2018

VIBRATIONS

IEC 60068-2-64. Random, 0.02g²/Hz 5-2000Hz 3x3h

SHOCK

IEC 60068-2-27. ±25g /6ms±3 x 3, 15000 total shocks

TEMPERATURE RANGE(°C)

Operating: -30 to +70, Storage: -40 to +80

MECHANICAL

HOUSING MATERIAL

Valox 357x

INSTALLATION

Panel mounted or 3 point RAM mount

CONNECTORS

Deutsch DTM06-12SA + SB multipin connectors for Power, Ethernet, CAN, USB and I/O

DIMENSIONS (MM)

234W x 134H x 51D

WEIGHT (G)

0.723



+27 83 790 7969



bern@qmi.co.za



56 Detroit Street, Benoni

PLATFORM SUPPORT

Below you find specifications of features for which the product platform has inherent hardware support. These are not currently available in the standard product specified above but may be added over time in the generic evolution of the product, or added for a specific, larger customer program.

CAN FD	BSP/SDK can be developed on request.
TOUCH SCREEN SENSITIVITY	Option to have touch controller calibrated for special use cases.
SECURITY	RSA/AES, elliptic-curve cryptography, key storage, secure boot-up, signed applications, docker. Hardware level virtualization for multi OS systems.
QT AUTOMOTIVE	Supports Qt Automotive, featuring e.g. safe rendering and IVI applications.
ANDROID	Supports Android
OS IN CO-PROCESSOR	Supports use of an RTOS in the integrated Cortex®M4F companion microcontroller (co-processor).



+27 83 790 7969



bern@qmi.co.za



56 Detroit Street, Benoni